

XTRAFoam™

MINIMAL EXPANDING FOAM SEALANT



XtraFoam™ is a low expansion, one-component, multipurpose, polyurethane formulated to seal around window and door frames. The product's low pressure, airtight insulation foam blocks drafts, moisture and insects without distending window and door frames. Once cured, it will not shrink or expand.

XtraFoam™'s advanced chemistry ensures excellent adhesion to most substrates, and an excellent water-resistant, airtight seal – as well as outstanding thermal and acoustical insulation. The product contains no CFC's or HCFC's, so it is environmentally friendly.

USES:

XtraFoam™ can be used for a variety of applications including, but not limited to, wood, aluminum and vinyl doors and windows, areas of air infiltration, windows, doors.

DIRECTIONS FOR USE:

Type: ALL substrates except PE and PP. State of Surface: clean, free of dust and grease. Preparation: Moistening of the surfaces improves adhesion, curing, and denser cellular structure. Aerosol can, shake well before use, insert into gun adaptor, turn 90 degrees where can is upside down and click to fit into foam gun. Shake can regularly during application. If PU Foam is applied in layers, spray surface with a fine water spray between each layer to ensure optimal cellular structure and perfect curing. Optimum Application temperature: +60-100°F. SEE INDIVIDUAL CANS OF FOAM FOR SPECIFIC INSTRUCTIONS. For Best Results, use in temperatures between 60-100°F. For Better Results, spray mist into cavity prior to applying foam.

STORAGE:

Material must be stored upright when not in use. 12 months in unopened packaging in a cool and dry storage place at temperatures of 75° F.

HEALTH AND SAFETY RECOMMENDATION:

Apply the standard industrial hygiene techniques. Wear gloves and safety goggles. Remove cured foam by mechanical means only, never burn away. SEE INDIVIDUAL CANS OF FOAM FOR SPECIFIC INSTRUCTIONS.

FEATURES:

- Will Not Warp or Bow Frames or Jamb
- Provides Water-Resistant, Airtight Seal
- Excellent Adhesion on Most Substrates
- High Thermal and Acoustical Insulation
- Low Expansion, Closed Cell Formula
- For Professional Gun Applications



CHEMICAL & PHYSICAL PROPERTIES

Base	Polyurethane
Curing System	Moisture Cure
Core Density	1.25 -1.70 lbs./ cu.ft.
R-Value ASTM C518	4.25 per inch
Pressure Build	0.15-1.20 psig
Color	Yellow
Service Temp	230°F
Curing Rate	30 Minutes for a ½ bead
Take Free	5 minutes for a ½ bead
Shelf Life	12 months, from date of mfg.
Coverage	164 linear feet

Weather Defense System

This XtraBond® product is a part of the XtraGuard Weather Defense System™, an integrated product line of building components developed from advanced materials research that increase the durability and comfort of residential and commercial structures by effectively managing moisture. The product's aggressive adhesion and compatibility with all major building materials makes it a critical link in the XtraGuard Weather Defense System, when combined with the company's complete line of Wraps and Flashing Products.

Green Advantage Program

This XtraBond® product is a part of Premier's "Green Advantage" Program – the designation of our commitment to not only superior products & services, but also the environment. Our engineering formulations, manufacturing standards and production practices allow us to be a leader in the supply of eco-friendly and VOC compliant products. Learn more at www.PremierBuildingSolutions.net/green

Who is Premier?

This XtraBond® product is manufactured and distributed by Premier Building Solutions, a manufacturer of high performance systems that provide protection in commercial and residential buildings – as well as a variety of other industrial and transportation applications.

The company's history of innovation has led to the development of breakthrough adhesive chemistries and new industrial-strength products that help customers increase the efficiency and durability of their critical assets.

LIMITED LIFETIME WARRANTY:

This product is guaranteed to give satisfactory performance if applied in accordance with the label directions. Liability to Premier Building Solutions, Inc. (Premier) is limited to a full refund of the purchase price or product replacement if product is proven defective. Premier shall not be liable for loss or damage, whether direct, consequential or incidental. There are no other warranties expressed or implied including the implied warranty of merchantability or fitness for a particular purpose.

Premier Building Solutions specifically disclaims and makes no warranties, express or implied, about this product, its merchantability, or its fitness for a particular purpose. All recommendations, directions, and suggestions for its use are consistent with our testing and research for a variety of applications, but no promises, guarantees, or warranties are being made with regard to its use, whether or not consistent with the directions, or its effectiveness for any given application. Users of this product should do so in compliance with all applicable laws and regulations. User of this product should conduct its own field test, to assure results.


211024-PBS-XtraFoam-Ver2



PACKAGING



AEROSOL CANS

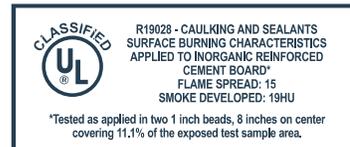

DOT 2Q